




# OI3106P/60W

## 6-Port Gigabit Industrial L2 Managed Switch with 4 PoE+ Ports and 2 SFP Ports

4x10/100/1000Base-T PoE+ (30 W), 2x100/1000Base-X SFP, 60 W PoE Budget, 250m PoE distance, DIP Switches, -40 to 75 °C Operating Temperature, IP40-rated, Wall/DIN-rail Mountable

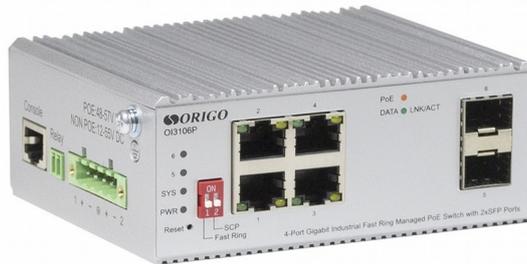

The ORIGO OI3106P/60W Industrial Managed L2 Switch is equipped with 4 Gigabit PoE+ ports and 2x100/1000Base-X SFP<sup>1</sup> ports.

The ORIGO OI3106P/60W switch is designed for building secure and fault-tolerant data transmission networks and for supplying powering high-consumption PoE equipment at sites with strict environmental requirements.

The ports 1–4 support IEEE 802.3af/at PoE standards, providing up to 30 watts of power per port with a total PoE budget of 60 watts. Built-in ESD protection meets industry surge standards, guarding the switch and connected devices from damage and network instability caused by ESD and lightning-induced surges.

The switch is adapted for using in the CCTV systems. The Extend PoE mode allows to overcome a standard Ethernet 100 m limit and to connect IP cameras at the distance of up to 250 m at the rate of 10 Mbps. This simplifies the installation and reduces the cost when building CCTV networks. The support of PD Alive и PoE schedule functions provides an automatic restart of hanging devices and the power optimization.

The ORIGO OI3106P/60W operates within a wide temperature range from -40 to +75 °C and supports the connection of two independent DC power supplies with redundancy capability, such as the OI75WPSU, OI120WPSU, or OI240WPSU. The rugged metal casing with IP40 protection and a reliable fanless ventilation system ensure stable operation in stringent industrial environments.

The ORIGO OI3106P/60W Switch's features include support for static routing, virtual local area networks (VLANs), quality of service (QoS), multicast management, security functions, and user access control.

To enhance network performance and fault tolerance, the switch supports link aggregation (LACP), connection redundancy through STP/RSTP/MSTP protocols, and LoopBack Detection for preventing network loops. SCP and Fast Ring DIP switches allow to quickly activate broadcast storm control and ERPS function, ensuring minimal recovery time in case of a line failure within the ring.

<sup>1</sup> To establish a 100 Mbps connection, the interface must be configured to 100Base-FX full-duplex mode.



## Key Features

- 4 x 10/100/1000Base-T ports with IEEE 802.3af/at PoE support
- 2 x 100/1000Base-X SFP ports
- Total PoE power budget: 60 W
- Adapted for CCTV: up to 250 m PoE distance, PD Alive and PoE schedule
- Dual redundant 48-57 V DC power inputs
- Alarm relay output (dry contact)
- DIP switches for quick activation of ERPS and storm control
- Surge protection up to 4 kV; ESD protection up to 8 kV
- Operating temperature range: -40 to +75 °C
- Rugged metal housing with IP40 protection; DIN-rail mountable
- Advanced L2 features with support for static routing
- Management via web interface, Telnet, SSH, console, and SNMP

## Specifications

### Hardware

CPU and Memory	<ul style="list-style-type: none"><li>• CPU: RTL8380MI</li><li>• RAM: 128 MB</li><li>• Flash: 32 MB</li></ul>
Interfaces	<ul style="list-style-type: none"><li>• 4 x 10/100/1000Base-T (RJ-45) ports with PoE support</li><li>• 2 x 100/1000Base-X SFP<sup>1</sup> ports</li><li>• RJ-45 console port</li></ul>
Standards and Functions	<ul style="list-style-type: none"><li>• IEEE 802.3 10Base-T</li><li>• IEEE 802.3u 100Base-TX</li><li>• IEEE 802.3ab 1000Base-T</li><li>• IEEE 802.3u 100Base-FX</li><li>• IEEE 802.3z 1000Base-X</li><li>• IEEE 802.3af PoE</li><li>• IEEE 802.3at PoE+</li><li>• IEEE 802.3x Full Duplex Flow Control</li><li>• IEEE 802.3az Energy-Efficient Ethernet</li><li>• Auto MDI/MDIX on all copper ports</li></ul>
LEDs	<ul style="list-style-type: none"><li>• Power<ul style="list-style-type: none"><li>- On: Power on state</li><li>- Off: Power off state</li></ul></li></ul>

<sup>1</sup> To establish a 100 Mbps connection, the interface must be configured to 100Base-FX full-duplex mode.

	<ul style="list-style-type: none"> <li>• Link/Act (Ports 1 – 6) <ul style="list-style-type: none"> <li>- Always bright: terminal device is connected</li> <li>- Blinking: Data transmission in progress</li> <li>- Off: No connection</li> </ul> </li> <li>• PoE (Ports 1–4) <ul style="list-style-type: none"> <li>- On: PoE device is connected</li> <li>- Off: No PoE device connected</li> </ul> </li> <li>• SYS <ul style="list-style-type: none"> <li>- Blinking: System operating normally</li> <li>- Off: System is booting or a fault has occurred</li> </ul> </li> </ul>
DIP Switches	<ul style="list-style-type: none"> <li>• Fast Ring (ON) to switch on / off ERPS</li> <li>• SCP (ON) to switch on / off Broadcast Storm Control</li> </ul>
Alarm Relay	<ul style="list-style-type: none"> <li>• One relay output (dry contact) for power failure notification</li> <li>• Relay contact load capacity: <ul style="list-style-type: none"> <li>- 2A at 30V DC</li> <li>- 0,5A at 125V DC</li> </ul> </li> </ul>
Power	<ul style="list-style-type: none"> <li>• DC: terminal block for connection of up to two independent power sources (48 to 57 V DC)</li> </ul>
Ventilation System	<ul style="list-style-type: none"> <li>• Fanless</li> </ul>
Casing	<ul style="list-style-type: none"> <li>• Metal</li> <li>• IP40-rated</li> </ul>
Mounting	<ul style="list-style-type: none"> <li>• Wall</li> <li>• DIN-rail</li> </ul>

## Capacity

Switching Capacity	<ul style="list-style-type: none"> <li>• 12 Gbps</li> </ul>
Packet Forwarding Rate	<ul style="list-style-type: none"> <li>• 8.93 Mpps</li> </ul>
Packet Buffer	<ul style="list-style-type: none"> <li>• 512 KB</li> </ul>
Transfer Mode	<ul style="list-style-type: none"> <li>• Store-and-forward</li> </ul>
MAC Address Table Size	<ul style="list-style-type: none"> <li>• 8K entries</li> </ul>
Routing Table Size	<ul style="list-style-type: none"> <li>• 512 entries (IPv4/IPv6)</li> </ul>
L3 Forwarding Table	<ul style="list-style-type: none"> <li>• 512 entries (IPv4/IPv6)</li> </ul>
Jumbo Frame	<ul style="list-style-type: none"> <li>• 9 216 bytes</li> </ul>

## PoE

PoE Standard	<ul style="list-style-type: none"><li>• IEEE 802.3af</li><li>• IEEE 802.3at</li></ul>
PoE Ports	<ul style="list-style-type: none"><li>• Ports 1-4</li></ul>
Max. Power per Port	<ul style="list-style-type: none"><li>• 30 W</li></ul>
PoE Power Budget	<ul style="list-style-type: none"><li>• 60 W</li></ul>
PoE Mode	<ul style="list-style-type: none"><li>• Type A</li></ul>
PoE Transmission Distance	<ul style="list-style-type: none"><li>• Up to 100 m<ul style="list-style-type: none"><li>– Data rate: up to 1000 Mbps</li></ul></li><li>• Up to 250 m<sup>2</sup><ul style="list-style-type: none"><li>– Data rate: up to 10 Mbps</li></ul></li></ul>
Management and Monitoring	<ul style="list-style-type: none"><li>• PoE Scheduling: Allows scheduled enabling/disabling of PoE on specific ports</li><li>• PD Alive: Continuously monitors PoE-powered devices (PDs) and automatically restarts unresponsive devices</li></ul>

## Software Features

L2 Features	<ul style="list-style-type: none"><li>• Flow Control</li><li>• Link Aggregation<ul style="list-style-type: none"><li>- Static</li><li>- 802.3ad</li><li>- Up to 8 groups per device / up to 8 ports per group</li></ul></li><li>• Load Balance<ul style="list-style-type: none"><li>- src-mac</li><li>- dst-mac</li><li>- src-ip</li><li>- dst-ip</li></ul></li><li>• Loopback Detection</li><li>• ERPS</li><li>• MRPP</li><li>• ULPP</li><li>• ULSM</li></ul>
-------------	--

<sup>2</sup>Data and power transmission at the distance of up to 250 m is possible when the port speed is configured to 10 Mbps. The connected device must also maintain an operation at the rate of 10 Mbps.

	<ul style="list-style-type: none"><li>• Spanning Tree Protocol<ul style="list-style-type: none"><li>- 802.1D STP</li><li>- 802.1w RSTP</li><li>- 802.1s MSTP (64 instances)</li><li>- Root Guard (Restriction)</li><li>- BPDU Guard (Restriction)</li></ul></li><li>• LLDP</li><li>• LLDP-MED</li><li>• Port mirroring<ul style="list-style-type: none"><li>- One-to-One</li><li>- Many-to-One</li><li>- Flow-based</li><li>- CPU-based</li><li>- Ingress, egress, both</li><li>- RSPAN</li></ul></li></ul>
VLAN	<ul style="list-style-type: none"><li>• 802.1Q, 4094 VLAN</li><li>• Port-based VLAN</li><li>• MAC-based VLAN</li><li>• Protocol-based VLAN (802.1v)</li><li>• Subnet-based VLAN</li><li>• Private VLAN</li><li>• VLAN Filtering</li><li>• Voice VLAN</li><li>• GVRP</li><li>• GMRP</li><li>• Double VLAN (Q-in-Q)<ul style="list-style-type: none"><li>- Selective Q-in-Q</li><li>- Port-based Q-in-Q</li></ul></li><li>• VLAN Translation</li><li>• Multicast VLAN</li></ul>
L2 Multicast	<ul style="list-style-type: none"><li>• IGMP Snooping<ul style="list-style-type: none"><li>- IGMP v1/v2/v3</li><li>- Supports up to 512 groups</li><li>- IGMP Snooping Fast Leave</li><li>- IGMP Proxy</li></ul></li><li>• MLD Snooping<ul style="list-style-type: none"><li>- MLD v1/v2</li><li>- Supports up to 512 groups</li></ul></li></ul>

	<ul style="list-style-type: none"><li>• Multicast Source/Destination (DCSCM)</li></ul>
L3 Features	<ul style="list-style-type: none"><li>• Maximum number of IP interfaces: 16</li><li>• 8K ARP entries</li><li>• Static routing for IPv4/IPv6<ul style="list-style-type: none"><li>- 512 IPv4 routes</li><li>- 512 IPv6 routes</li></ul></li><li>• Gratuitous ARP</li></ul>
QoS	<ul style="list-style-type: none"><li>• 802.1p</li><li>• CoS based on:<ul style="list-style-type: none"><li>- DSCP</li><li>- VLAN ID</li><li>- IP Precedence</li><li>- IP ACL/ MAC ACL/ IPv6 ACL</li><li>- IPv6 Flow Labels</li></ul></li><li>• Queue handling<ul style="list-style-type: none"><li>- Strict Priority (SP)</li><li>- Weighted Round Robin (WRR)</li><li>- Weighted Deficit Round Robin (WDRR)</li></ul></li><li>• Port-based bandwidth control</li><li>• Supports up to 8 egress queues per port</li></ul>
Security	<ul style="list-style-type: none"><li>• Port Security<ul style="list-style-type: none"><li>- Supports up to 8K MAC addresses per port</li></ul></li><li>• Port Isolation</li><li>• Storm Control</li><li>• Dynamic ARP Inspection</li><li>• ARP Spoofing Protection</li><li>• ARP Scanning Prevention</li><li>• ARP Guard</li><li>• DoS Attack Prevention</li><li>• DHCP Snooping</li><li>• DHCPv6 Snooping</li><li>• IPv6 SAVI</li><li>• Security RA</li><li>• CPU Protection</li></ul>
AAA	<ul style="list-style-type: none"><li>• 802.1X Authentication:<ul style="list-style-type: none"><li>- Port-Based</li><li>- MAC-Based</li></ul></li></ul>

	<ul style="list-style-type: none"><li>• Guest VLAN</li><li>• IPv6 RADIUS Server</li><li>• RADIUS/TACACS+ Authentication</li></ul>
Access Control Lists (ACL)	<ul style="list-style-type: none"><li>• Up to 1.5K ACL entries</li><li>• ACL based on:<ul style="list-style-type: none"><li>- VLAN</li><li>- MAC address</li><li>- IPv4 address</li><li>- DSCP</li><li>- ToS</li><li>- TCP/UDP port number</li><li>- User-defined ACL</li></ul></li><li>• Time-based ACLs</li></ul>
OAM	<ul style="list-style-type: none"><li>• Cable diagnostics</li><li>• ULDP (Unidirectional Link Detection Protocol)</li><li>• Dying Gasp</li><li>• 802.3ah Ethernet Link OAM</li><li>• 802.1ag Connectivity Fault Management (CFM)</li><li>• DDM (Digital Diagnostics Monitoring)</li><li>• Watchdog</li></ul>
Management	<ul style="list-style-type: none"><li>• Web-based UI</li><li>• CLI</li><li>• Telnet</li><li>• SSH</li><li>• FTP</li><li>• TFTP</li><li>• System Log</li><li>• SNMP v1/v2c/v3</li><li>• SNMP Traps</li><li>• SNTP</li><li>• NTP</li><li>• Firmware Backup/Upgrade</li><li>• Ping/Traceroute for IPv4/IPv6</li><li>• DHCP Server</li><li>• DHCPv6 Server</li><li>• BootP/DHCP Client</li><li>• DHCP Relay</li><li>• DHCPv6 Relay</li></ul>

- DHCP Option 82, 43, 60, 61, 67
- IPv4/IPv6 DNS Client

## Physical Parameters

Dimensions (W x D x H)	• 110 x 90 x 46 mm
Weight	• 0.48 kg
Package Dimensions	• 23.4 x 19 x 8.6 cm
Gross Weight	• 0.74 kg

## Operating Conditions

Power Input	• 48-57 V DC
Current Consumption	• 1.6 A (max.)
Maximum Power Consumption	• 69 W (PoE on) • 8.04 W (PoE off)
Standby Power Consumption	• 2.21 W
MTBF (hours)	> 100 000
Surge Protection	• Up to 4 kV (common mode) • Up to 2 kV (differential mode)
Electrostatic Discharge (ESD) Protection	• Contact discharge: up to 6 kV • Air discharge: up to 8 kV
Temperature	• Operating: -40 to 75 °C • Storage: -40 to 80 °C
Humidity	• Operating: 5% to 95% (non-condensing) • Storage: 0% to 95% (non-condensing)

## Package Contents

Package Contents	• OI3106P/60W Switch • RJ-45 Console Cable • Quick Installation Guide
------------------	---

## Order Info

OI3106P/60W	Industrial Managed L2 PoE Switch, 4x1000Base-T, 2x1000Base-X SFP, 250m PoE, -40...75 °C
-------------	---